

2014 | KBA RAPIDA RA 106 5 L SPC ALV2

+ IMPRESSORA OFFSET 2014 5 CORES + VERNIZ



DESCRIÇÃO DA IMPRESSORA

EQUIPAMENTO

- Wallscreen Application
- CIP Link com conexão on-line
- VARIDAMP amortecedor de álcool
- Qualitronic ColorControl
- Intercommunication system between infeed and delivery
- DriveTronic SPC - Mudança Simultânea de Chapas
- Controle eletromecânico de dupla folha
- Artronic Saida
- ALV 2 Prolongamento duplicado da saída
- Additional washing cloth spindle
- Additional anilox roller (according to KBA standard)
- QualiTronic Quality Pass - Creation of colour measurement reports for quality control
- ErgoTronic ACR - Automatic Camera Register, video camera for register setting
- ErgoTronic ImageZoom - Video magnifier and digital linen tester

SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU



DETALHES TÉCNICOS

- Impressão (Milhões) : 210
- Formato máximo : 740 x 1,060
- Produtividade : 18.000
- Frequency: 400V/50Hz
- Formato mínimo :: 340 x 480
- Formato máx. de impressão: 730 x 1050


+34 682 639 187

info@machinex.com




- IPA reduction < 5% incl. microfilter "beta.f" (TECHNOTRANS)
- 7 o'clock arrangement of the cylinders
- Uninterruptible power supply to enable controlled press shutdown in case of power supply failure Operating system MS Windows
- PressSupport24 Sheetfed with internet connection for remote maintenance as well as software updates
- VariDry IR/HotAir in delivery and extended delivery (ALV2)
- Varnish supply and cleaning system for water based varnish with operation via control console pump output depended on viscosity (Harris & Bruno) with 2 nd varnish circulation systems for using different types of varnish
- Additional package "High efficiency antistatic equipment "
- Pile exit in sheet travel direction (central)
- QualiTronic LiveView - Display of a "live" image of each printed sheet
- 1 Coating unit (L) with chambered doctor blade system
- ColorTronic ink fountain with 35 ink keys each 30 mm wide
- SIS – Sensoric Infeed System, sidelay-free lateral sheet alignment with automatic format setting via ErgoTronic console, lateral alignment occurs by means of movable infeed gripper bar
- Register adjustment from ErgoTronic console, lateral +/- 1.5 mm, circumferential +/- 1.0 mm, diagonal +/- 0.12 mm
- CleanTronic - Multi-purpose washing system for blankets and impression cylinders & roller washing system for conventional OR UV inks
- Antistatic equipment feeder, high-performance version for side blowers
- Inking unit temperature control without ink duct roller cooling, incl. High-tech combi-cooling unit, air-cooled (TECHNOTRANS)
- Roller covering for alcohol-reduced printing
- ErgoTronic ColorDrive - Ink density measurement along the x-axis at the ErgoTronic console
- DataMatrix-Select Automatic plate identification and uploading of job data via plate ident
- Electromechanical multiple-sheet detection with adjustment monitoring

SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

 +34 682 639 187

 info@machinex.com



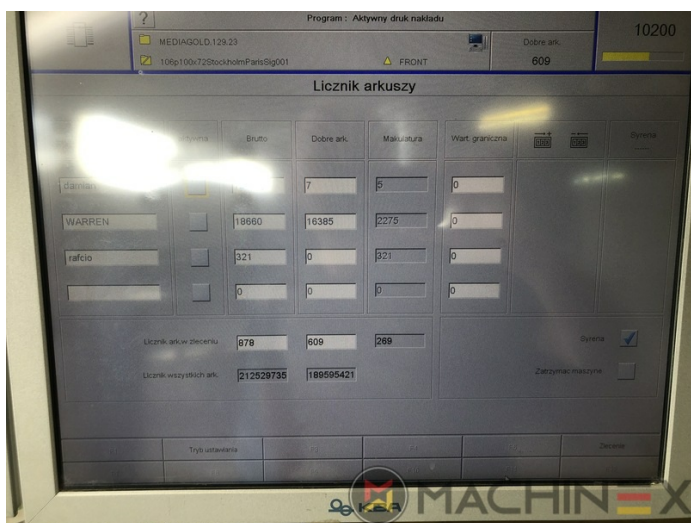


SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com



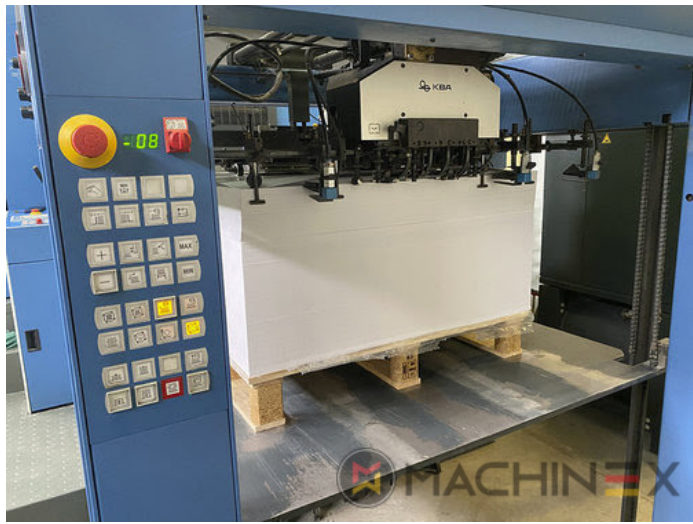


SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com

 **MACHINEX**

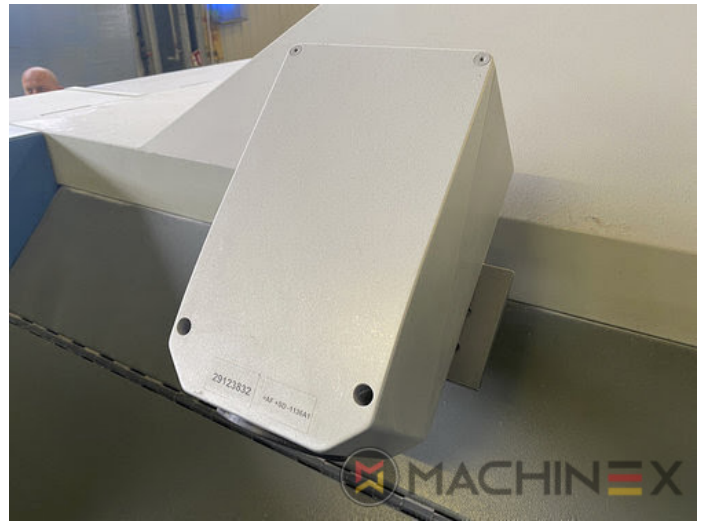


SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com

 **MACHINEX**

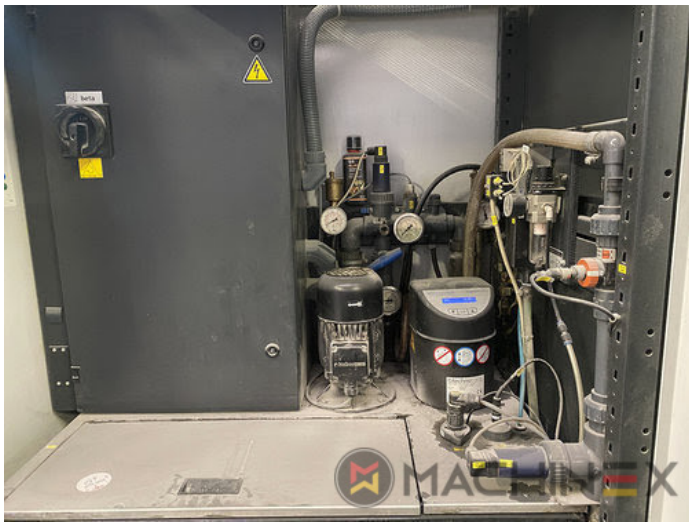

SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com






SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com



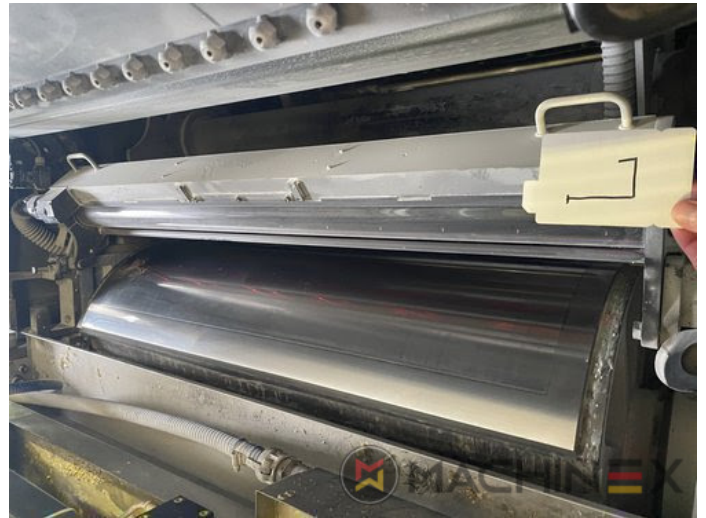

SPAIN | GERMANY | USA | ITALY | TURKEY | CHINA | BRAZIL | MEXICO | PERU

+34 682 639 187

info@machinex.com

